


**form +
function**

Privacy



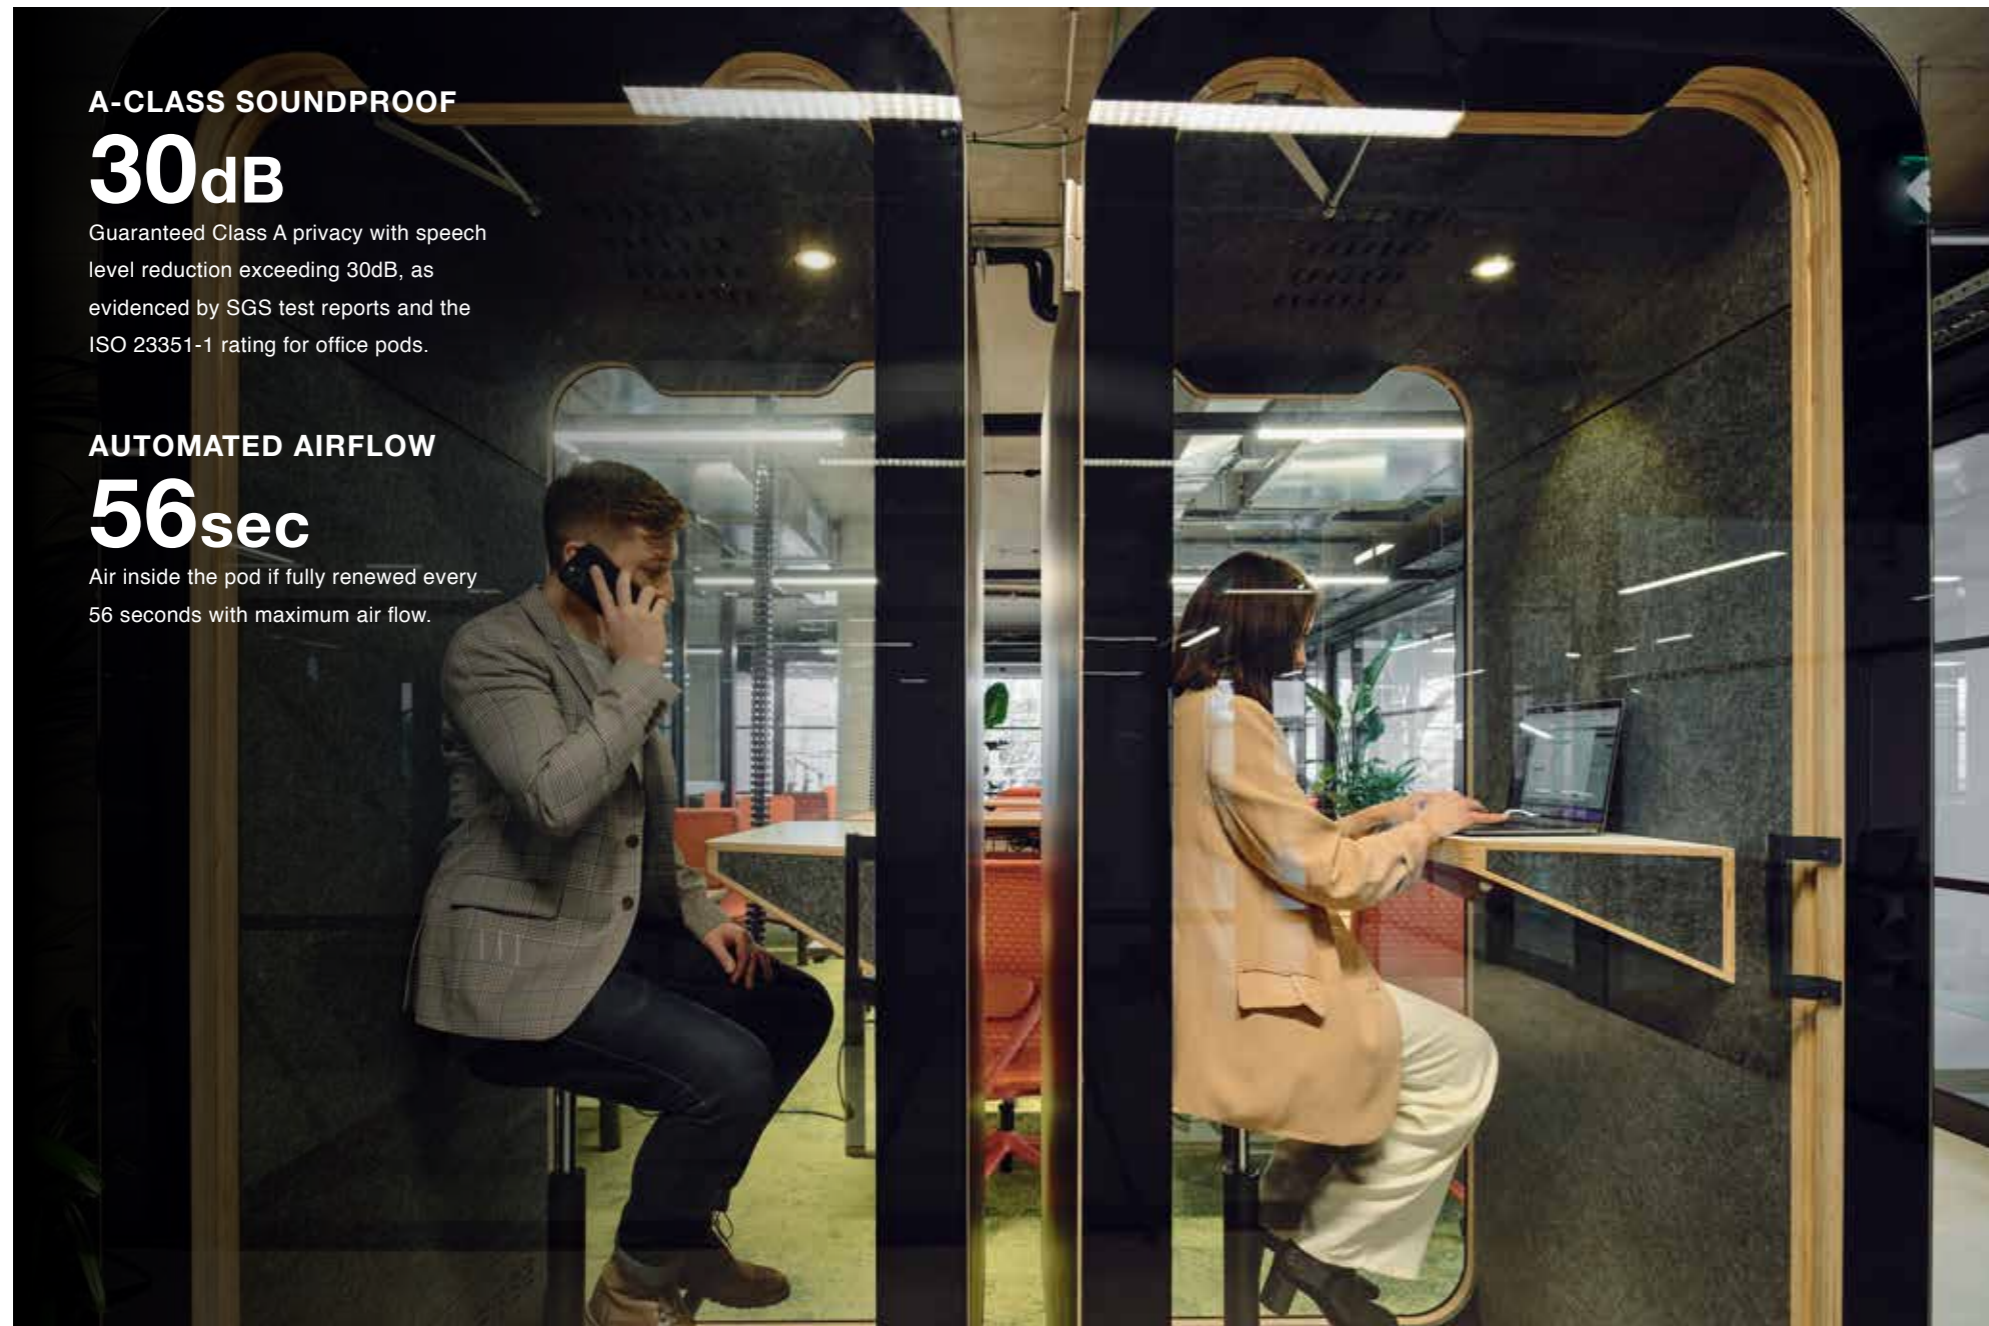

A-CLASS SOUNDPROOF

30dB

Guaranteed Class A privacy with speech level reduction exceeding 30dB, as evidenced by SGS test reports and the ISO 23351-1 rating for office pods.

AUTOMATED AIRFLOW

56sec

Air inside the pod is fully renewed every 56 seconds with maximum air flow.

Elevate Your Workspace with the Privacy Booth

Introducing Privacy, the ultimate solution for those seeking a quiet and secluded space within a bustling environment. Available in both single and double booth options, Privacy is designed with a powder-coated steel exterior and an enamelled glass door, offering a sleek and modern look. The booths are equipped with LED brightness adjustment options, air ventilation, and superior acoustic performance, making them perfect for private calls, Zoom meetings, or simply finding a noise-free zone to focus on work. Now featuring the option for a high-resolution touchscreen, it simplifies the setup and adjustment of the ventilation and lighting systems within the soundproof pod. Incorporating high CRI lighting that mimics natural daylight and using natural birch plywood materials, creates a space for phone and short-term work that feels even closer to nature. Optional adjustable ceiling lighting adapts to your needs and can be made quickly and easily through the touchscreen. Experience unparalleled privacy and comfort with this versatile booth.



WHITE PRIVACY SINGLE STANDARD 100



WHITE PRIVACY SINGLE PREMIUM 100



BLACK PRIVACY SINGLE PREMIUM120

Single

Features

- Powdercoated sheet metal exterior
- Birch plywood frame, enameled sound control glass, acoustic felt interior
- Interface Carpet
- Integrated electric sockets
- Automatic controlled LED lighting Air Ventilation
- Controlled by the device with PCT patent
- Ventilation rate: more than 1 m³/min
- Fixed table

Specifications

- Overall: 1000W x 1050D x 2200H
- Interior: 800W x 1010D x 2000H
- Door: 1000W x 2200H
- Weight: 405kg
- Table: 800W x 300D x 160H
- Table Height: 1040
- Seat Height: 660

Options

- USB charging
- Frosted glass
- Height adjustable stool or cadrea stool
- Height adjustable table equipped with safety mechanism

Premium

- Integrated touch screen allows you to adjust the lighting & ventilation according to your preference
- Adjustable LED lights
- Advanced dual-fan smart ventilation
- Exterior occupancy indicator

Premium 120

1200W



PRIVACY DOUBLE FEATURING NEW KEYPAD FOR LIGHTING AND AIRFLOW CONTROL

PRIVACY DOUBLE FEATURING CUSTOM ELECTRIC WORKSTATION

PRIVACY DOUBLE FEATURING NEW LIGHTING SYSTEM

Double

Features

Powdercoated sheet metal exterior
 Birch plywood frame, enameled sound control glass, acoustic felt interior
 Interface Carpet
 Integrated electric sockets
 Automatic controlled LED lighting
 Air Ventilation Controlled by the device with PCT patent
 Ventilation rate: more than 2 m³/min
 Fixed table & two sofas

Specifications

Overall: 2200W x 1200D x 2240H
 Interior: 2000W x 1150D 2000H
 Door: 1000W x 2200H
 Weight: 570kg
 Table: 700W x 380D x 640H
 Sofa: 1100W x 640D x 700H

Options

USB Charging
 Frosted glass
 Custom electric workstation or bench available

Premium

Integrated touch screen allows you to adjust the lighting & ventilation according to your preference
 Adjustable LED lights
 Advanced dual-fan smart ventilation
 Exterior occupancy indicator

PET Finishes




Laminate Finishes



Powdercoat Finishes



Sofa Upholstery Finishes

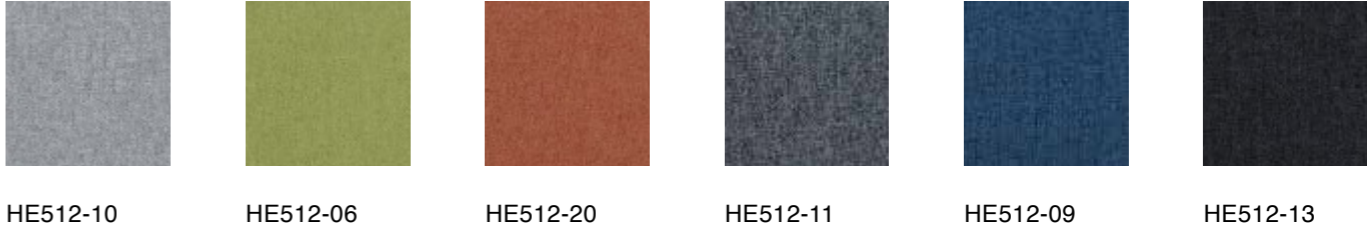

In house testing

Currently there is no standard test for measuring the acoustic values of a small enclosed space like our booths. Therefore we have completed our own in house acoustic testing, in line with the following standards.

Healthy Air Environment

TVOC lower than 0.06 mg/m³ (ISO16000) Achieved and classified by ISO 16000-6:2011 Indoor air -- Part 6: Determination of volatile organic compounds in indoor and test chamber air by active sampling on Tenax TA sorbent, thermal desorption and gas chromatography using MS or MS-FID Formaldehyde lower than 0.05 mg/m³ (ISO16000). Achieved and classified by ISO 16000-3:2011 Indoor air -- Part 3: Determination of formaldehyde and other carbonyl compounds in indoor air and test chamber air -- Active sampling method.

Clear Sound Environment

The attenuation of the door module and glazing module is from 40.2dBA to 42.9dBA Within range of 1.5M The attenuation of 1 meter outside the door module is 40.2dBA and 1.5 meters is 42.6dBA. The attenuation of 1 meter outside the glazing module is 41.5dBA and 1.5 meters 42.9dBA. Evaluate sound insulation performance, the weighted sound pressure insulation (Dp,w) is 30dB. When the fan and light are working properly or close, the internal noise level (LPA) is 30.5 dB and background noise level (LA) is 20.4 dB. Achieved and classified by ISO 11957:1996, IDT "Acoustic- Determination of sound insulation performance of cabins-laboratory and in-situ measurements". Evaluate sound absorption on the inner surface, the noise reduction coefficient (NRC) is 0.20. Achieved and classified by ISO354:2003 "Acoustics -Measurement of sound absorption in a reverberation room" ASTM C423-02a "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method"

Fire Safety

To ensure meeting fire safety requirements for the interior material: Acoustic felt meet :B-s1, d0, EN 13501-1, and meet the Achieved and classified by " EN 13501-1:2007+A1:2009 Fire Classification of Construction Products and Building Elements Classification Using Test Date from Reaction to Fire Tests" Floor carpet meet requirements of standard B1 level. Achieved and classified by GB8624-2012, GB/T11785-2005, GB/T8626-2007.

Safety Requirements of EC Directives

To ensure meeting the safety requirements of relevant EC directives, Including: Low Voltage Directive (LVD) and Electromagnetic Compatibility Directive (EMC).

form + function



VICTORIA

Level 1, 16-20 Howard Street
North Melbourne 3051

ACT

83 Wollongong Street
Fyshwick 2609

form-function.com.au

 formfunctionco

 formfunctionaus